

40" WIDESCREEN LCD MARINE HEAD MONITOR

29LM403003

DATASHEET

HIGH QUALITY, RUGGED METAL CONSTRUCTION

The 29LM403003 Series of 40" LCD monitors has been designed primarily for information applications in the maritime environment. They utilise WXGA TFT panels with KME designed mechanical enhancements to give superior image performance and ruggedness. The IP model provides additional sealing to IP65 in a rugged metal housing with glass protection screen making it suitable for sheltered external usage. User controls and the AC power supply are integrated in the monitor head.

The monitor is suitable for use with 16:9, 4:3 and 5:4 aspect ratio video; its multiple video inputs make it usable in a range of applications with simple interfacing to most video and data systems.



SOLUTIONS FOR MARINE APPROVED MONITORS

- > **Versatile Display Head**
- > **IP65 sealed housing with protective sunscreen**
The front is sealed to IP65 rating for water and dust resistance.
- > **Certified & Approved**
The marine range is designed to comply with EN 60945
- > **Inputs**
All monitors have VGA (multi scanning), DVI and PAL.
Power 110-220V AC.
- > **Widescreen (16:9) formats up to WXGA resolution.**

40" WIDESCREEN LCD MARINE HEAD MONITOR

29LM403003

DATASHEET

| Electrical Description | | Mechanical Description | |
|--------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|------------------------------|
| TFT Characteristics: | | Dimensions: | Monitor: 1000 x 610 x 140 mm |
| Type: | 40" a-Si AM TFT | Weight: | 54kg (approx) |
| Max Resolution: | 1366 x 768 pixels | Input Connectors: | HD 15 D-Sub / BNC |
| Active Display Area: | 885 x 497 mm | User Controls: | Rear Mounted |
| Response Time: | 8ms average, typical | Housing: | Aluminium |
| *Contrast Ratio: | 2000:1 typical | Sealing: | IP65 on front |
| *Brightness: | 500cd/m ² typical | Approvals | |
| Viewing Angles (at CR>10): | 178° / 178° | ECDIS & Radar Compliance: | |
| Backlight Life: | 50,000 typical | IEC 61174: | Designed to comply |
| No. Colours: | 16.7 million | EMC & Safety: | |
| | | EN 60950 | Designed to comply |
| Synchronisation Range: | | | |
| Horizontal scan: | 30-70 kHz | | |
| Vertical Scan: | 50-85 Hz | | |
| Display modes: | 640 x 480 VGA 800 x 600 SVGA 1024 x 768 XGA 1280 x 1024 SXGA 1360x768 1366x768 WXGA(recommended) | | |
| Power Supply: | 110/220V 50/60Hz | Part Numbers: | |
| Power Consumption: | 280W Max. | | |
| Environmental: | **Operating Temp: -15 to +55 °C (IEC 60945 tests) Storage Temp: -20 to +60 °C Operating Humidity: 30% to 90% (non condensing) Storage Humidity: 10% to 90% (non condensing) Shock: 10g, 11msec ½ sine Vibration: +/-1mm, 2 to 13Hz: 0.7g, 13 to 100Hz | Monitor (Black finish): | 29LM403003 |
| **Quoted EN60945 test. We do not recommend routine operation at extreme temperatures * Brightness and Contrast refer to naked LCD panel | | | |

Due to a policy of continuous product development KME reserves the right to change specifications and descriptions without prior notification. All trademarks acknowledged.

KENT MODULAR ELECTRONICS LTD
621 Maidstone Road
Rochester, Kent ME1 3QJ
T: +44 (0)1634 830123 F: +44 (0)1634 830619
E: sales@kme.co.uk W: www.kme.co.uk




40" WIDESCREEN LCD MARINE HEAD MONITOR


29LM403003

DATASHEET


FRONT VIEW

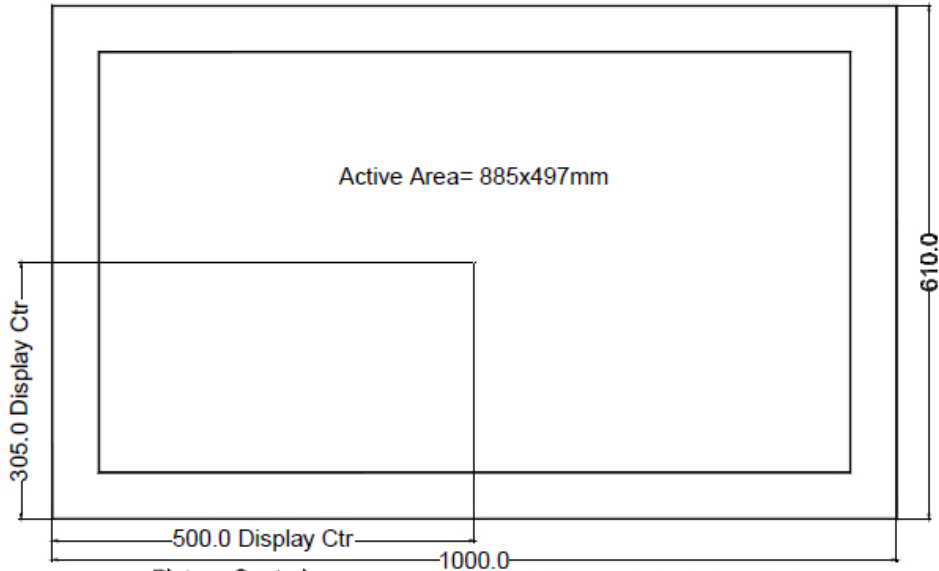


SIDE VIEW

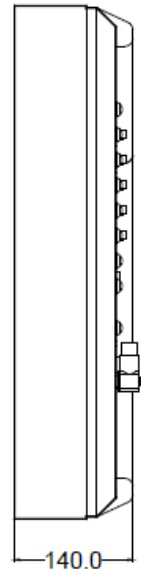

REAR VIEW

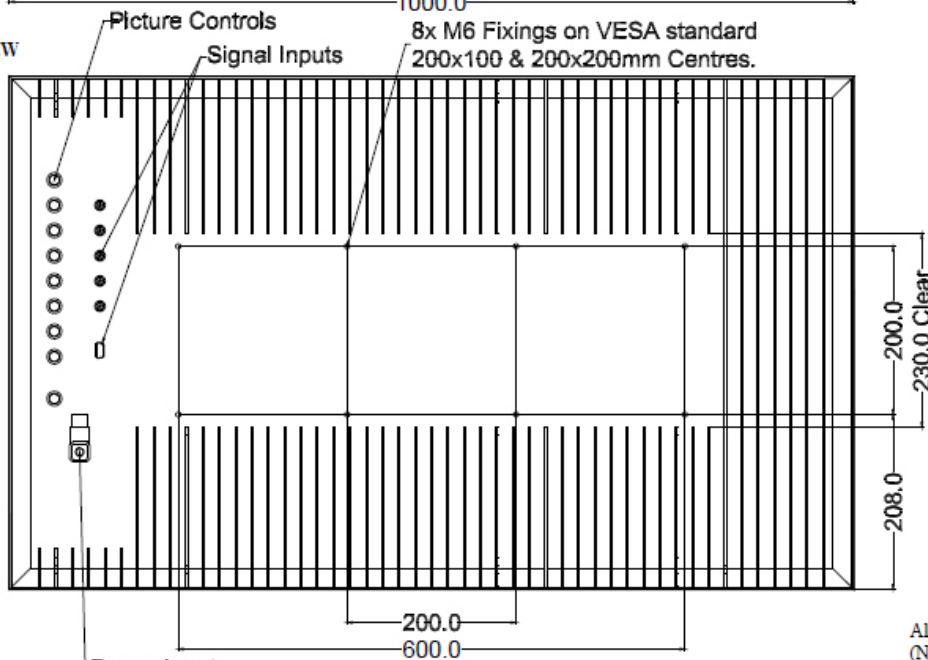

BOTTOM VIEW

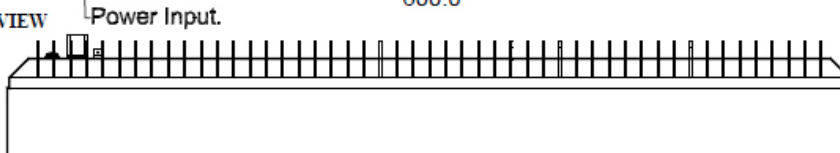

All dimensions in millimetres
(Not to scale)